

# *Video System Converter*

*Operation Manual*





## **TABLE OF CONTENTS**

<b>1. Introduction.....</b>	<b>1</b>
<b>2. Main Features.....</b>	<b>1</b>
<b>3. Hardware Description.....</b>	<b>2</b>
3.1 Front Panel.....	2
3.2 Rear Panel.....	2
<b>4. Connections and Installation.....</b>	<b>3</b>
<b>5. Specifications.....</b>	<b>3</b>

## **1. Introduction**

The Video System Converter is designed to convert video signal from source of NTSC, N4, PAL, PAL M, PAL N, and SECAM systems (automatically detected), to NTSC or PAL signal selectable, for the connected display to work properly. It is a convenient device for user to connect source and display of different TV systems, and, with the on-panel adjusters it's easy to fine-tune minor screen offset caused by display of different type. The installation is simple, just plug in video cables of input / output and power adapter, and switch between NTSC and PAL to get the preferable result.


## **2. Main Features**

- Supports digital conversion from NTSC, N4, PAL, PAL M, PAL N, and SECAM to NTSC/PAL.
- Converts 525 lines to/from 625 lines.
- Converts refresh frequency between 60Hz and 50Hz.
- Provides built-in color bar pattern.
- System is capable with 8 Mb field memory.

### 3. Hardware Description


The following sections describe the hardware components of this converter box.

#### 3.1. Front Panel

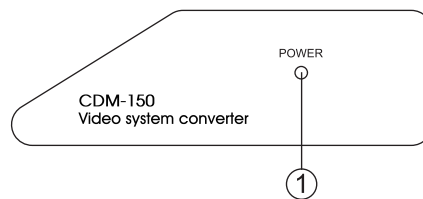


1. The LED indicator will illuminate when the unit is powered on.

#### 3.2. Rear Panel

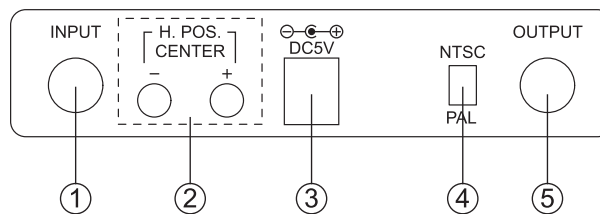

1. Video input: Connect to video source using video composite cable.
2. H. POS. Center: To adjust the display to right/left.
3. DC 5V/1A: Plug the 5VDC power supply into the unit and connect the adaptor to AC wall outlet.
4. NTSC/PAL: Select the output signal. NTSC supports 3.58 format only.
5. Video output: Connect to display using video composite cable.

## 4. Connections and Installation

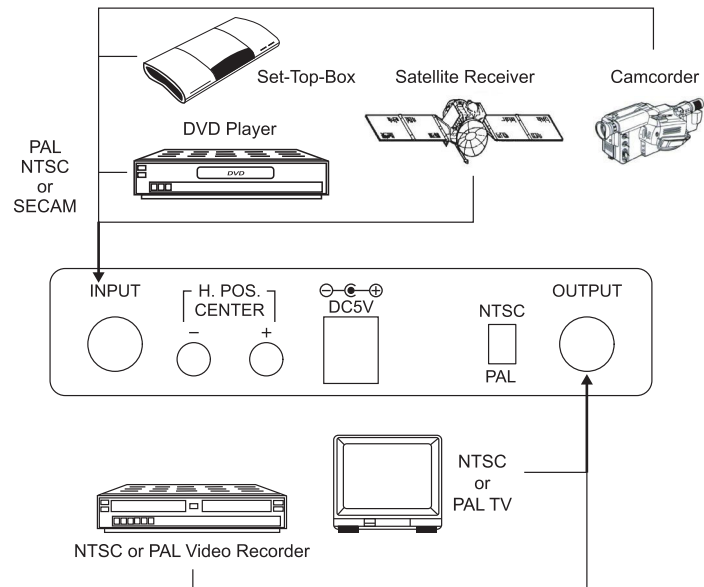

## 5. Specifications

Input System	NTSC, N4, PAL, PAL M, PAL N, and SECAM
Output System	NTSC 3.58, PAL
Input Port	Video
Output Port	Video
Sampling Frequency	Y: 13.5MHz R-Y: 6.75MHz B-Y: 6.75MHz
Digital Code bit	R: 8 bits G: 8 bits B: 8 bits
Line	525/625
Field	60/50
Power Supply	5V/1A DC (US/EU standards, CE/FCC/UL certified)
Dimensions (mm)	146(W) x 95(D) x 33(H)
Weight(g)	144
Chassis Material	Plastic
Silk Skin Color	Milk White
Operating Temperature	Operating from 0°C ~ 48°C





**CYPRESS TECHNOLOGY CO., LTD.**  
Home page: <http://www.cypress.com.tw>